


DIMENSIONS (mm) :

Nominal dimensions: 450 x 26

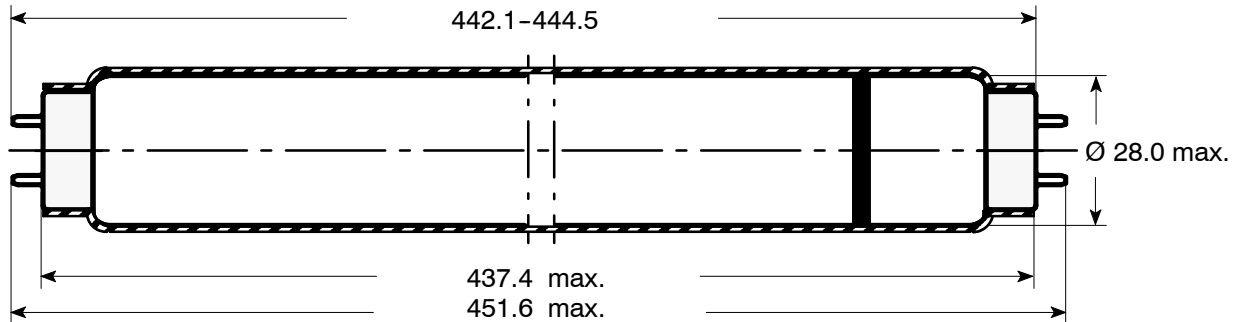

Cap: G13 (IEC61-1 sheet 7004-51-7)

ELECTRICAL DATA

		<u>NOMINAL VALUE</u>	<u>MIN.</u>	<u>MAX.</u>
Frequency	(Hz) :	50		
Lamp nominal wattage	(W) :	15		
Lamp rated wattage	single operation (W) :	15.0	13.8	16.2
	series operation (W) :	32		
Lamp operating voltage	(V) :	55.0	46.0	64.0
Lamp current	single operation (mA) :	310		
	series operation (mA) :	350		
Preheat current	single operation (mA) :	440		
	series operation (mA) :	510		

OPERATING CONDITIONS

		<u>NOMINAL VALUE</u>	<u>MIN.</u>	<u>MAX.</u>
Cap rim temperature	(°C) :			125
Lamp ambient temperature	(°C) :		-20	
Ballast impedance	single operation (Ω/V) :	325/127, 590/220, 621/230, 660/240		
	series operation (Ω/V) :	480/220, 510/230, 540/240		
Starter	single operation :	FS-11, FS-22, COP-22		
	series operation :	FS-22, COP-22		
Burning position	:	any		

LAMP LIFE *

Average life (50% failure rate)	(h) :	14 000
Individual life	(h) :	6 000

PHOTOMETRIC DATA:

COLOUR	No.	UV-A irradiance 1m distance bare lamp (315-400nm) (μW/cm ²)	UV-B irradiance 1m distance bare lamp (280-315nm) (μW/cm ²)	ILCOS-Code
BLACKLIGHT average at 0 h		38,21	0,42	XUV/FD15-E-G13-26/450

Issued by : SLI Lichtsysteme
Date : 20.03.2007
Revision Date :

DATA SHEET


Specification No.: 51P-6121
Supersedes :
Page 1 of 2



Evaluation acc. to EN60335-2-59


MW 15WT8BL350

0 h

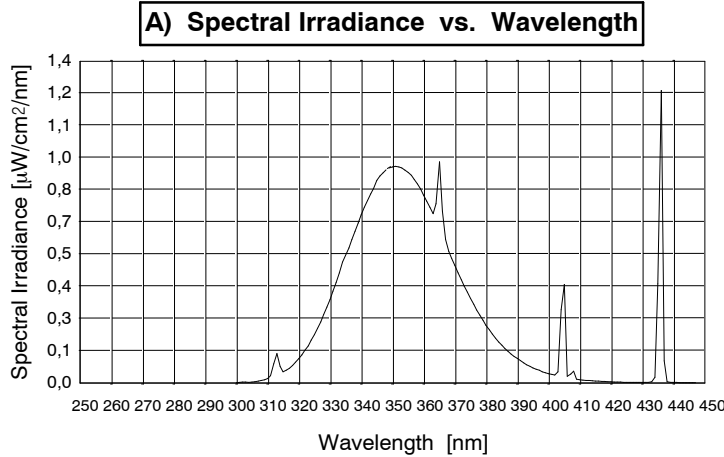

Spectral Irradiance @ 1m distance


UVA = 38,21 µW/cm²
UVB = 0,42 µW/cm²
UVB/UVA = 1,10%
 Wavelength range acc. to CIE
 UVA : 315 - 400 nm
 UVB : 280 - 315 nm
Lamp parameter:
Voltage: 55,0V
Current: 0,310A
Power: 15,0W

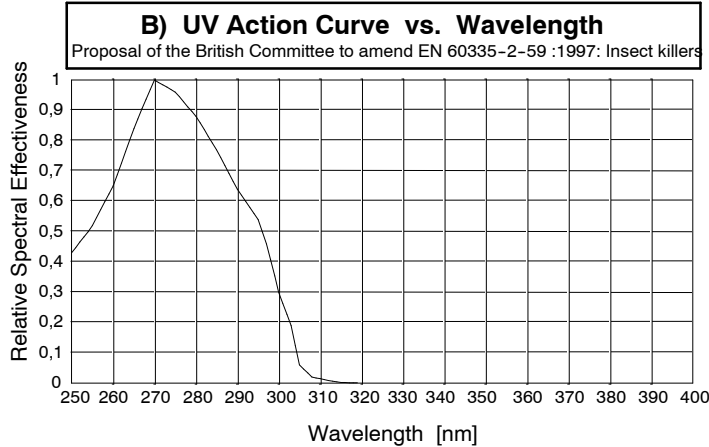

Acc. to EN 60335-2-59 : 1997
CLC/TC61(GB)579

Total Effective Irradiance @ 1m distance
Max. 1mW/m²

Reason: to ensure that the ICNIRP 8 hour effective radiant exposure limit for the eyes and skin of 30 J/m² is not exceeded

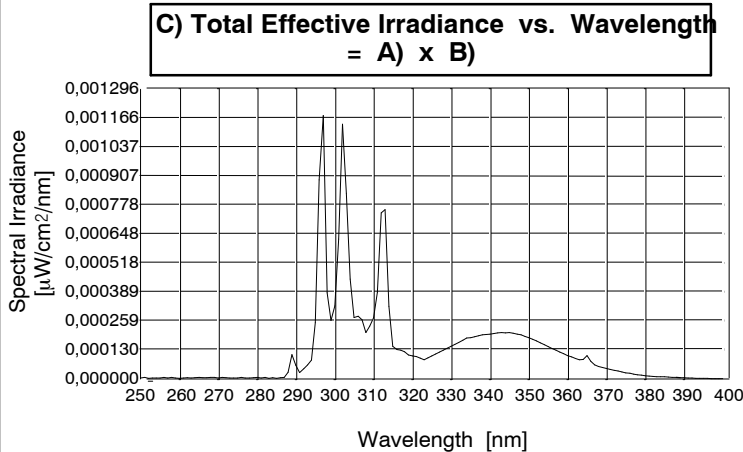

Total Effective Irradiance @ 1m distance
0,189 mW/m²

Datenfile: MWF15WT8BL350.dat

ATTENTION:

This UV energy source emits UV radiation. Avoid exposure to skin and eyes.
 Lamps comply with the requirements of IEC/EN 60081 and IEC/EN 61195, respectively.
 Starter and ballast must comply with EN 60155 and EN 60921, respectively.
 The electronic ballast for lamp operation must comply with IEC/EN 60929.
 This lamp shall be replaced at the end of the rated life.
 * Life test according to IEC/EN 60081, Annex C.

Issued by : SLI Lichtsysteme
 Date : 20.03.2007
 Revision Date :

DATA SHEET

Specification No.: 51P-6121
 Supersedes :
 Page 2 of 2